



# Sweepers & Sweeper Collectors




- Sweep and Collect in One Operation
- Sweeper mounted on a heavy duty, Hydraulic link box
- Can be separated to use as standard link box
- Range available in widths 6' 10", 7' 10", 8' 10" (2.08m, 2.38m and 2.69m)
- Link Box comes with Quick attach onto tractor
- Standard Hardened wear edge on link box
- Oil flow requirements 7.6 gallons per Minute (35 litres)
- Galvanised canopy as standard
- Various combinations of bristles (segments) available, i.e. Polypropylene and Steel or Polypropylene
- Park stands for sweeper when not in use
- Option of Kerb Brush
- Option of Dribble bar for dust suppression





MODEL	LINK BOX WIDTH	BRUSH WIDTH	LINK BOX VOLUME
6' 10" (2.08m)	2035mm	1830mm	0.57m <sup>3</sup>
7' 10" (2.38m)	2340mm	2135mm	0.66m <sup>3</sup>
8' 10" (2.69m)	2640mm	2440mm	0.74m <sup>3</sup>

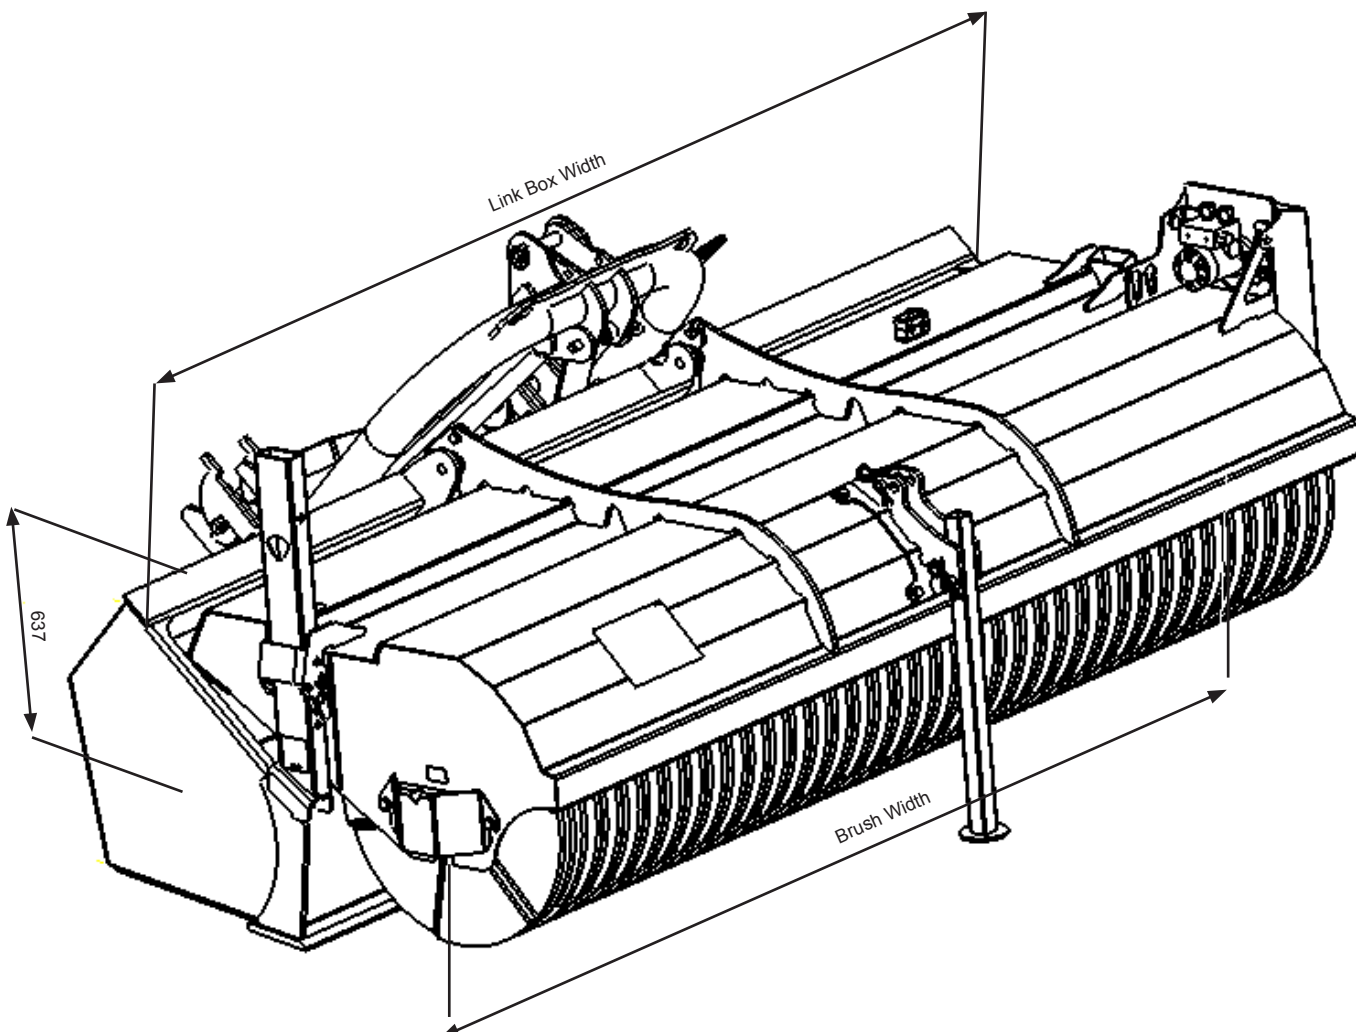

- Can be angled to sweep to either side
- Oil flow requirements. 7.6 gallons per minute (35 litres)
- Range available in Sweeping widths 2.13m and 2.44m and 2.74m
- Heavy duty adjustable pneumatic wheels provide a more efficient brushing action
- Standard bristles – 22" (558mm) diameter
- Various combinations of bristles (segments) available, ie polypropylene and steel or polypropylene
- 3-point linkage
- Front or rear mounted




- Sweep & Collect in One Operation
- Buckets supplied as standard with hardened wear edge
- Range of Telehandler / Loader brackets available
- Sizes available 7', 7'9", 8' 9" (2.13m, 2.36m, 2.66m)
- Can be manufactured to fit existing buckets
- Hydraulic driven sweeper
- Oil flow requirements 7.6 gallons per minute (35 litres)
- Rotar driven via reliable chain drive which allows the operator to get closer to a wall / kerb than with a direct drive machine
- Hydraulic motor is mounted on top of sweeper away from damage
- All polypropylene available on request
- Option of dribble bar for dust suppression





MODEL	LINK BOX WIDTH	BRUSH WIDTH	LINK BOX VOLUME
7' (2.13m)	2155mm	1905mm	0.88m <sup>3</sup>
7'9" (2.36m)	2385mm	2135mm	0.92m <sup>3</sup>
8'9" (2.66m)	2690mm	2440mm	1.11m <sup>3</sup>

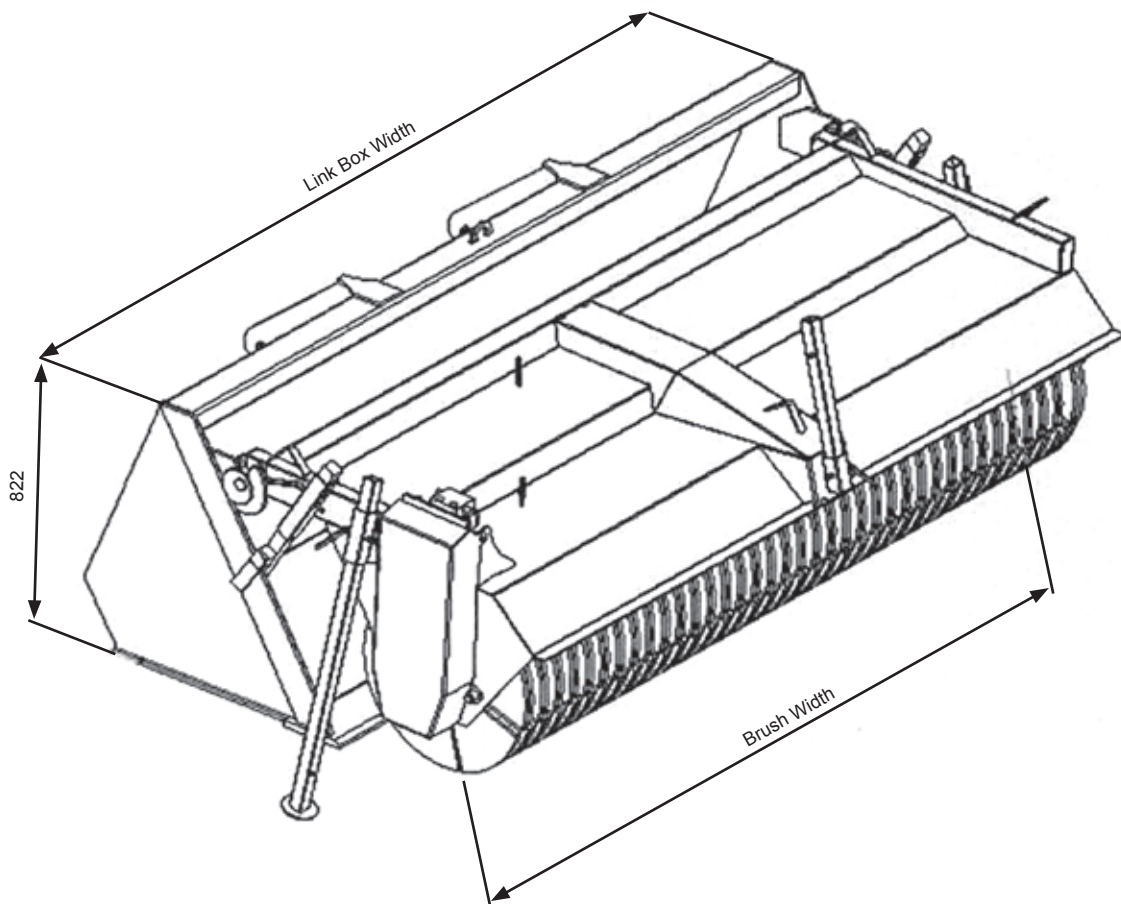

- Heavy duty galvanised steel construction.
- Push brush – no moving parts.
- Option of mounting to forks, 3 point linkage, bucket, handler brackets or excavator plate.
- Integrated parking stands for storage.
- Choice of 3 sweeping widths, 2.0m, 2.5m & 3.0m
- 11 rows of quick change bristles
- Low dust creation – easy clean design



Revision.04 January 2023

In accordance with our policy of continued development we reserve the right to alter specification and design without notice.



NC Engineering (Hamiltonsbawn) Ltd  
2 Killyrudden Road  
Hamiltonsbawn  
Co.Armagh  
Northern Ireland  
BT61 9SF

Tel: 028 38 871970  
Fax: 028 38 870362

[www.nc-engineering.com](http://www.nc-engineering.com)

